arXiv:1206.2288v1 [nlin.CD] 11 Jun 2012

Distributed delays in systems of coupled phase oscillators

Lucas Wetzel,[1] Luis G. Morelli,[1, 2, 3] Andrew C. Oates,[2] Frank Jülicher,[1, *] and Saúl Ares[1, 4, †]
[1] *Max Planck Institute for the Physics of Complex Systems, Nöthnitzer Str. 38, 01187 Dresden, Germany*
[2] *Max Planck Institute for Cell Biology and Genetics, Pfotenhauerstr. 108, 01307 Dresden, Germany*
[3] *CONICET, Departamento de Física, UBA, Ciudad Universitaria, 1428 Buenos Aires, Argentina*
[4] *Grupo Interdisciplinar de Sistemas Complejos (GISC), and Logic of Genomic Systems Laboratory,*
Centro Nacional de Biotecnología - CSIC, Calle Darwin 3, 28049 Madrid, Spain
(Dated: March 8, 2013)

We study systems of identical phase oscillators with a delay distribution in their coupling that weights contributions arising from different past times. For any coupling topology with equal number of neighbors for each oscillator, we show that the frequency and stability of the fully synchronized states only depend on the mean of the delay distribution. However, transient dynamics leading to complete synchronization are affected by the shape of the delay distribution. Our work validates the use of discrete delays to study the synchronized states of more general delayed coupled systems.

PACS numbers: 05.45.Xt, 02.30.Ks,

Systems of coupled oscillators with delay in the coupling are important for several physical, chemical, engineering, and biological phenomena [1]. For example, cellular systems as the vertebrate segmentation clock [2–4] have been studied using systems of phase oscillators coupled with a discrete delay [5, 6]. However, fluctuations in gene expression and transport of macromolecules introduce a variability in the time delay associated with cell to cell communication. One way to account for such variability is to consider that past states from different times can affect the evolution of the system with different weights. This is what is usually referred to as distributed delay [7].

In this work we study a generic model of phase oscillators coupled with distributed delay:

$$\dot{\theta}_k(t) = \omega + \frac{K}{n}\sum_{l=1}^{N} d_{kl}h\left(\int_0^\infty dsg(s)\theta_l(t-s) - \theta_k(t)\right), \tag{1}$$

where N is the number of oscillators in the system, $k = 1, 2, \ldots, N$, $\theta_k(t)$ is the phase of the k-th oscillator, n is the number of coupling connections each oscillator has, K is the coupling strength, $h(\theta)$ is a 2π-periodic coupling function, $g(s)$ denotes the delay distribution, and ω is the intrinsic frequency of individual oscillators. The d_{kl} are the coefficients of the connectivity matrix $\mathbb{D}$: $d_{kl} = 1$ if oscillator k is connected to oscillator l and $d_{kl} = 0$ otherwise. We consider normalized delay distributions fulfilling $\int_0^\infty dsg(s) = 1$, and define the mean of this distribution as:

$$\int_0^\infty dsg(s)s = \bar{\tau}. \tag{2}$$

Global frequency of phase-locked steady states. We look for phase-locked synchronized solutions of Eq. (1) with no phase lags:

$$\theta_k(t) = \Omega t, \tag{3}$$

where the phases of all oscillators are equal and grow linearly in time with the global frequency Ω. We substitute this ansatz into Eq. (1) and obtain the solution for Ω by a self-consistent approach [8, 9]:

$$\Omega = \omega + Kh(-\Omega\bar{\tau}). \tag{4}$$

Eq. (4) is independent from the number of oscillators in the system. It depends only on the mean delay, and not on the particular shape of the delay distribution $g(s)$. In particular, this means that the functional dependence of the global frequency in steady state is identical for discrete delays τ and distributed delays with mean $\bar{\tau} = \tau$.

Linear stability of the synchronized steady state. Earl and Strogatz [10] derived a stability criterion for the phase-locked steady state in systems of coupled phase oscillators with discrete delays in the coupling, corresponding to $g(s) = \delta(s - \bar{\tau})$ in Eq. (1). Their result holds for arbitrary coupling topologies where each oscillator has the same number of coupling connections, see Fig. 1. We extend this result for arbitrary delay distributions $g(s)$. The stability of the solutions of Eq. (4) is determined by linear stability analysis. We add a perturbation $q_k(t)$ to

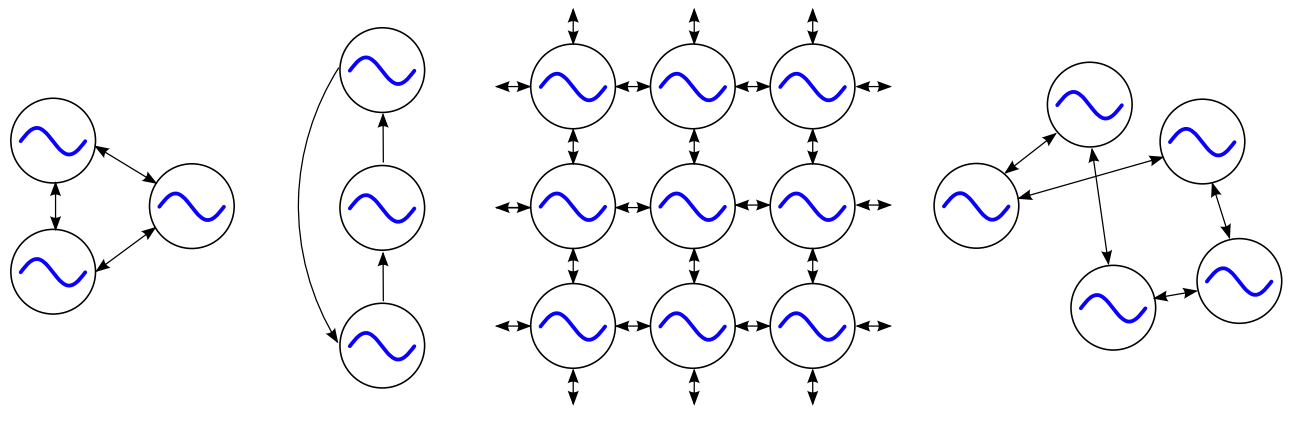

FIG. 1: Examples of connection topologies considered in this work. Left to right: all-to-all connected system, ring topology with unidirectional connections, square lattice, and randomly connected system. Each oscillator has the same number of connections to other oscillators in all these systems.

Eq. (3):

$$\theta_k(t) = \Omega t + \epsilon q_k(t), \tag{5}$$

with $\epsilon \ll 1$ and substitute it into Eq. (1). The first order dynamic equations for the time evolution of the perturbation read:

$$\dot{q}_k(t) = \frac{\alpha}{n}\sum_{l=1}^{N} d_{kl}\left[\int_0^\infty ds\, g(s) q_l(t-s) - q_k(t)\right], \tag{6}$$

where

$$\alpha \equiv K h'(-\Omega\bar{\tau}). \tag{7}$$

For the functional form of the perturbation we introduce the ansatz $q_k(t) = c_k e^{\lambda t}$ and substitute into Eq. (6):

$$c_k \lambda = \frac{\alpha}{n}\sum_{l=1}^{N} d_{kl}\left[c_l \hat{g}(\lambda) - c_k\right], \tag{8}$$

where $\hat{g}(\lambda)$ is the Laplace transform of the delay distribution [11, 12]:

$$\hat{g}(\lambda) \equiv \int_0^\infty ds\, g(s) e^{-\lambda s}. \tag{9}$$

Since $\sum_{l=1}^{N} d_{kl} = n$ from the requirement that any oscillator k has exactly n coupling neighbors, then for $\alpha \neq 0$ Eq. (8) can be rearranged:

$$\frac{n}{\hat{g}(\lambda)}\left(\frac{\lambda}{\alpha} + 1\right) c_k = \sum_{l=1}^{N} d_{kl}\, c_l. \tag{10}$$

Values of λ such that $\hat{g}(\lambda) = 0$ lead to singularities that are not meaningful physically, and must be excluded. We can write for the left hand side:

$$\zeta \equiv \frac{n}{\hat{g}(\lambda)}\left(\frac{\lambda}{\alpha} + 1\right), \tag{11}$$

where ζ are the eigenvalues of the connectivity matrix $\mathbb{D}$. In matrix notation Eq. (10) reads $\zeta\vec{c} = \mathbb{D}\vec{c}$.

Using Gerschgorin's circle theorem [10, 13–15], an upper bound on the modulus of the eigenvalues ζ is given by the number n of connections each oscillator has:

$$|\zeta| \leq \sum_{l=1}^{N} |d_{kl}| = n, \tag{12}$$

from which:

$$\frac{|\zeta|}{n} \leq 1. \tag{13}$$

The absolute value of the Laplace transform, $|\hat{g}(\lambda)|$, is also bounded. With $\lambda = x + i\,y$, and $|g(s)| = g(s)$, since $g(s) \geq 0 \;\forall\; s$, we make use of the triangle inequality to show that for all $x \geq 0$:

$$\begin{aligned} |\hat{g}(\lambda)| &= \left|\int_0^\infty ds\, g(s)\, e^{-(x+iy)s}\right| \leq \int_0^\infty ds\, g(s)\left|e^{-(x+iy)s}\right| \\ &= \int_0^\infty ds\, g(s)\left|e^{-xs}\right|\left|e^{iys}\right| \leq 1, \end{aligned} \tag{14}$$

where we have used that $\left|e^{iys}\right| = 1$ and $|e^{-xs}| \in [0,\,1] \;\;\forall\;\; x \geq 0$. Since $\hat{g}(\lambda)$ and ζ are complex numbers, we define:

$$\hat{g}(\lambda) \equiv |\hat{g}(\lambda)|\, e^{i\psi}, \tag{15}$$

$$\zeta \equiv |\zeta|\, e^{i\xi}, \tag{16}$$

where ψ and ξ are phases in the complex plane. Rewriting Eq. (11) using this notation, we obtain:

$$\alpha\, |\hat{g}(\lambda)|\, e^{i\psi}\frac{|\zeta|}{n} e^{i\xi} = (x + iy + \alpha), \tag{17}$$

which can be separated into real and imaginary parts:

$$\alpha\, |\hat{g}(\lambda)|\, \frac{|\zeta|}{n}\cos(\psi + \xi) = x + \alpha, \tag{18}$$

$$\alpha\, |\hat{g}(\lambda)|\, \frac{|\zeta|}{n}\sin(\psi + \xi) = y. \tag{19}$$

Squaring these two last equations and adding them gives:

$$\alpha^2\, |\hat{g}(\lambda)|^2\left(\frac{|\zeta|}{n}\right)^2 = (x + \alpha)^2 + y^2. \tag{20}$$

With Eqs. (13,14,18,20) we can show the following result concerning the stability of the synchronized solutions of Eq. (1) with frequency obeying Eq. (4): for all λ that satisfy Eq. (10), $\mathrm{Re}(\lambda) < 0$ holds if and only if $\alpha \equiv K h'(-\Omega\bar{\tau}) > 0$. This means that the stability of the synchronized states given by the solutions of Eq. (4) depend only on the sign of α, which is independent of the shape of the delay distribution. This is the key finding of this paper.

This result can be shown as follows. First we assume there exists an $\alpha > 0$ such that $x = \mathrm{Re}(\lambda) \geq 0$ and show that this leads to a contradiction. We start dividing both sides of Eq. (20) by α^2:

$$|\hat{g}(\lambda)|^2\left(\frac{|\zeta|}{n}\right)^2 = 1 + \frac{(x^2 + y^2 + 2\,|\alpha|\,|x|)}{\alpha^2}. \tag{21}$$

Using from Eq. (13) that $|\zeta|/n \leq 1$, and from Eq. (14) that $|\hat{g}(\lambda)| \leq 1 \;\forall\; x \geq 0$, we see that the product on the left hand side of Eq. (21) is smaller or equal than 1. The case of equality to 1 implies $x = y = 0$, i.e. $\lambda = 0$. This corresponds to the eigenvector $(1,\,1,\,\ldots,\,1)^T$, which reflects the rotational symmetry of the system. The system is neutrally stable under such a perturbation. For all $\lambda \neq 0$, the right hand side of the equation will

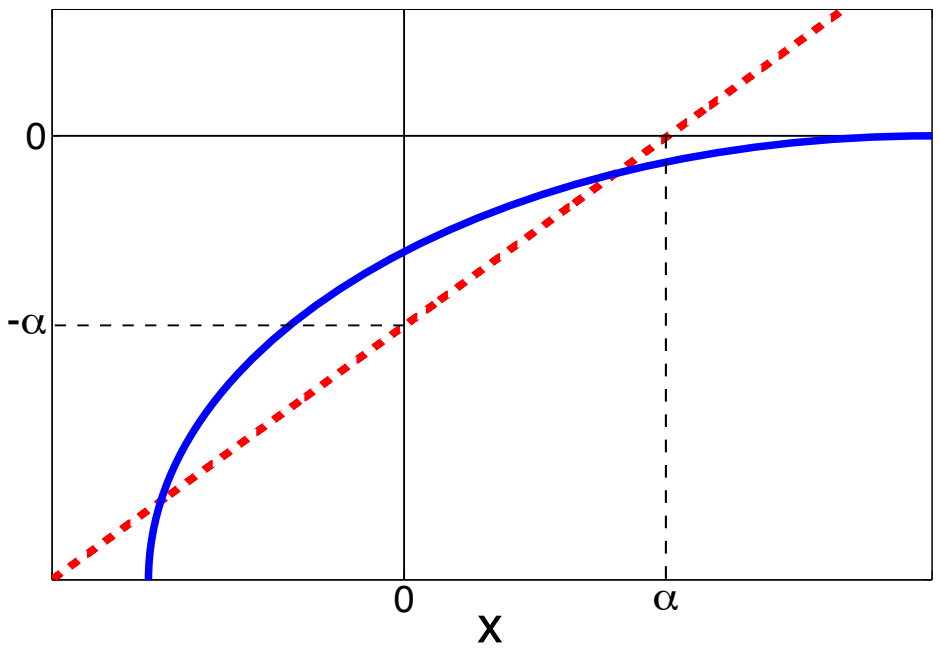

FIG. 2: Left (dashed red) and right (continuous blue) hand side of Eq. (24) plotted as a function of x. The dashed curve always crosses the the y-axis at $y = -|\alpha|$ and the continuous curve always crosses in the interval $[-|\alpha|, 0)$. Since the continuous curve approaches zero for $x \to \infty$, but crosses the y-axis at values $\geq -|\alpha|$, there must always be an intersection of the two curves for $x \geq 0$, and hence a solution to Eq. (24).

always be greater than 1. This poses a contradiction and it follows that for $\alpha > 0$ there are no solutions with $\mathrm{Re}(\lambda) > 0$. This means that $\alpha > 0$ assures linear stability.

Now we complete the proof showing that if $\alpha < 0$ there is always at least one $x = \mathrm{Re}(\lambda) \geq 0$. For $\alpha < 0$, we can rewrite Eq. (18) using $\alpha = -|\alpha|$:

$$-|\alpha| \, |\hat{g}(\lambda)| \, \frac{|\zeta|}{n} \cos(\psi + \xi) = x - |\alpha| \, . \tag{22}$$

A case differentiation for the cosine term is necessary to cover all possible signs of the left hand side. For the case $\cos(\psi + \xi) \leq 0$ we have $\cos(\psi + \xi) = -|\cos(\psi + \xi)|$. Rearranging Eq. (22) to find x yields:

$$x = |\alpha| \left(1 + |\hat{g}(\lambda)| \, \frac{|\zeta|}{n} \, |\cos(\psi + \xi)| \right), \tag{23}$$

and we see that $x > 0$. For the case $\cos(\psi + \xi) > 0$, the equation

$$x - |\alpha| = -|\alpha| \, |\hat{g}(\lambda)| \, \frac{|\zeta|}{n} \, |\cos(\psi + \xi)| \tag{24}$$

can be graphically analyzed plotting separately the left and the right hand sides, see Fig. 2. In the limit of x approaching infinity we have: $x \to +\infty \Rightarrow |\hat{g}(\lambda)| \to 0$; whereas for the case of x approaching minus infinity: $x \to -\infty \Rightarrow |\hat{g}(\lambda)| \to \infty$, see Eq. (14). To finish the qualitative characterization of the right hand side of Eq. (24), we look at its behavior at $x = 0$. Recalling the normalization of the delay distribution and using that $\left|e^{-iys}\right| = 1$, we find:

$$|\hat{g}(\lambda)| = \left| \int_0^\infty ds \, g(s) \, e^{-iys} \right| \leq \int_0^\infty ds \, g(s) \, \left|e^{-iys}\right| = 1, \tag{25}$$

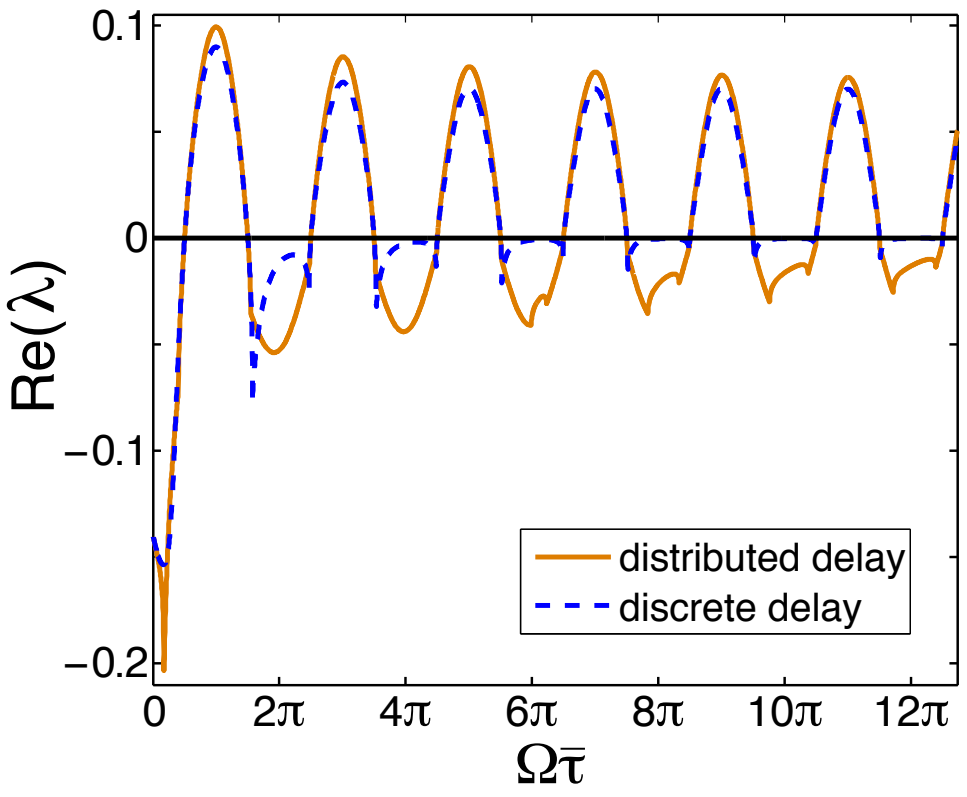

FIG. 3: $\mathrm{Re}\,(\lambda)$ versus $\Omega\bar{\tau}$ for the eigenvalue λ with the largest real part. Dashed blue line represents the discrete delay case and the solid orange line a distributed delay with an exponential distribution of mean $\bar{\tau}$, $g(s) = e^{-s/\bar{\tau}}/\bar{\tau}$. $N = 2$, intrinsic frequency $\omega = 0.223\,\mathrm{min}^{-1}$, coupling strength $K = 0.07\,\mathrm{min}^{-1}$, nearest neighbor interaction, and coupling function $h(\theta) = \sin(\theta)$.

and the right hand side of Eq. (24) cannot cross the vertical axis at a value smaller than $-|\alpha|$. It follows that for $\alpha < 0$ there always exists a solution $x = \mathrm{Re}(\lambda) \geq 0$, see Fig. 2, and therefore the system is linearly unstable.

Conclusions and outlook. We have shown for systems of phase oscillators coupled with distributed delays that the linear stability of the phase-locked steady state without phase lags, given by the solutions of Eq. (4), depends only on the mean of the delay distribution, and is independent of its shape. A natural conclusion is that the discrete delay approximation is a reasonable one when interested in synchronized steady state dynamics, which have been the focus of much research. Among the many examples of studies using discrete delays, we highlight their use to model cellular coupling in the vertebrate segmentation clock [5]. This permitted the characterization of several mutations in zebrafish leading to the discovery of the first period mutants in this system [6]. Our work here shows that the results for the segmentation clock should be robust to the use of distributed delays, validating the discrete delay approximation in [5, 6]. By extension, it also validates this use in other problems [1].

Our result in this paper concerns steady states, but we can also say something about transient dynamics. Eq. (11) suggests that for different $\hat{g}(\lambda)$ the real and imaginary parts of λ might change, while the sign of the real part is independent of $\hat{g}(\lambda)$. In this case, the modes resulting from perturbations of the steady state can decay or grow with different rates for delay distributions with different variance and skewness. This is indeed the case, as we show in Fig. 3, where we see that the fastest decaying mode is different for discrete delay and a gamma distributed delay. Note that, despite the different shape of the curves for the different kind of delays, the crossings of the $\mathrm{Re}(\lambda) = 0$ axis occur at the same points for both kind of delays, as our result assures. This dependence of the dynamics on the shape of the delay distribution is an intriguing topic that we will address in future work.

We thank the Jülicher and Oates groups. S.A. acknowledges funding from CSIC through the Junta para la Ampliacin de Estudios program (JAEDOC014, 2010 call) co-funded by the European Social Fund, and from Ministerio de Ciencia e Innovacin (Spain) through grant MOSAICO. L. G. M. acknowledges ANPCyT PICT 876. L. G. M. and A. C. O. were supported by the Max Planck Society and the European Research Council under the European Communities Seventh Framework Programme (FP7/ 2007-2013)/ERC Grant No. 207634.

---

[*] Electronic address: julicher@pks.mpg.de
[†] Electronic address: saul.ares@csic.es

[1] S. Ares, L. G. Morelli, D. Jörg, A. C. Oates, and F. Jülicher, Phys. Rev. Lett. **108**, 204101 (2012).
[2] O. Pourquié, Cell **145**, 650 (2011).
[3] D. Roellig, L. G. Morelli, S. Ares, F. Jülicher, and A. C. Oates, Cell **145**, 800 (2011).
[4] A. C. Oates, L. G. Morelli, and S. Ares, Development **139**, 625 (2012).
[5] L. G. Morelli, S. Ares, L. Herrgen, C. Schröter, F. Jülicher, and A. C. Oates, HFSP J. **3**, 55 (2009).
[6] L. Herrgen, S. Ares, L. G. Morelli, C. Schröter, F. Jülicher, and A. C. Oates, Curr. Biol. **20**, 1244 (2010).
[7] N. MacDonald, C. Cannings, F. C. Hoppensteadt, and L. A. Segel, *Biological Delay Systems: Linear Stability Theory.*, Cambridge Studies in Mathematical Biology (Cambridge University Press, 2008).
[8] H. G. Schuster and P. Wagner, Prog. Theor. Phys. **81**, 939 (1989).
[9] M. K. S. Yeung and S. H. Strogatz, Phys. Rev. Lett. **82**, 648 (1999).
[10] M. Earl and S. H. Strogatz, Phys. Rev. E **67**, 036204 (2003).
[11] D. Widder, *The Laplace transform.*, Princeton Mathematical Series (Princeton University Press, 1946).
[12] F. W. Olver, D. W. Lozier, R. F. Boisvert, and C. W. Clark, *NIST Handbook of Mathematical Functions.* (Cambridge University Press, 2010), 1st ed.
[13] S. Gerschgorin, Izv. Akad. Nauk. UdSSR Otd. Fiz.-Mat. Nauk **7**, 749 (1931).
[14] H. E. Bell, Am. Math. Mon. **72**, 292 (1965).
[15] G. Strang, *Introduction to Applied Mathematics* (Wellesley-Cambridge Press, Wellesley, MA, 1986).